

metabo®

PROFESSIONAL POWER TOOL SOLUTIONS

Metabo 2020/21



when it really counts



**SB 18 LT SET
MOBILE WORKSHOP
602103600**

Battery voltage: 18 V
Maximum torque: 60 Nm
Drill-Ø masonry: 13 mm
Drill Ø steel: 13 mm
Drill-Ø soft wood: 38 mm
No-load speed: 0-450/1600 rpm



2,000 rivets per charge 4.0 Ah LiHD
Ø 5mm Rivets

CORDLESS BLIND RIVET GUN

NP 18 LTX BL 5.0

619002840

BRUSHLESS

MACHINE ONLY



Rivet Ø all materials: 2.4 - 5 mm
Max. rivet Ø in aluminum: 6 mm
Placement force: 10000 N

CORDLESS BAND SAW

MBS 18 LTX 2.5

613022850

MACHINE ONLY



Maximum cutting width: 63.5 mm
Saw belt length: 835 mm
Saw belt width: 13 mm
Saw band speed: 174 m/min

CORDLESS METAL CUTTING CIRCULAR SAW

MKS 18 LTX 58

600771840

MACHINE ONLY



Adjustable cutting depth : 0-58 mm
Maximum cutting depth at 90°: 58 mm
Saw blade Ø x bore : 165x20 mm
Max. cutting speed : 31 m/s

CORDLESS TAPPERS

GB 18 LTX BL Q I

603828500

BRUSHLESS



Maximum torque, hard: 120 Nm
Drill Ø steel: 13 mm
Drill-Ø soft wood: 65 mm

CORDLESS BEVELLING TOOL

KFM 18 LTX 3 RF

601754840

MACHINE ONLY



Max. chamfer width 45°: 6 mm
Max. chamfer height at 45°: 4 mm

CORDLESS BURNISHING MACHINE

S 18 LTX 115

600154850

MACHINE ONLY



Spindle thread: M 14
Abrasive tool diameter: 100 - 200 mm
Abrasive tool width: 50 - 100 mm

CORDLESS TUBE BELT SANDER

RB 18 LTX 60

600192850

MACHINE ONLY



Belt speed in idle: 9.2 m/s
Dimensions of grinding belt: 30 x 533 mm
Maximum pipe diameter: 60 mm

Bevelling Accessories




CARBIDE INDEXABLE INSERTS 45°




No.ord. 6.23560

CARBIDE INDEXABLE INSERTS R3



6.23562

CARBIDE INDEXABLE INSERTS R2



6.23561

MKS 18 LTX 58 Accessories



STEEL CUT CLASSIC

Diameter **Ø 165**
No.ord. 6.28651
Universal use for cold cuts in metals

ALUMINIUM CUT PROFESSIONAL

Diameter **Ø165**
No.ord. 6.28059
Perfect cuts in aluminium thanks to special tooth geometry


MBS 18 LTX 2.5 Accessories

835X13X0,5MM, BIM, 14/18 TPI, 2 PCS



Diameter **Ø 835 x 13 x 0.5 mm**
No.ord. 6.26429
Carbon steel with induction hardened teeth
Very economical due to its long useable working life

STEEL POLISHING AND BURNISHING ACCESSORIES

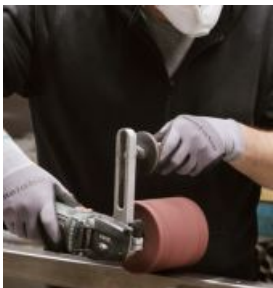

EXPANSION ROLLER



SANDING BELTS 90 X 100 MM



FLAP WHEEL 105X100 MM



FLAP WHEEL 105X100 MM



NYLON WEB GRINDING WHEEL 105 X 100 MM



GRIT	N/A	P80	P80	P180	P280
Pc.x conf.	1	10	1	1	1
No.ord.	6.23470	6.23474	6.23484	6.23485	6.23514



SANDING BELTS 30 X 533 MM



SANDING BELTS 30 X 533 MM



SANDING BELTS 30 X 533 MM



SANDING BELTS 30 X 533 MM



NYLON WEB BANDS



FELT BAND 30 X 533 MM



Grit	P180	P240	P320	P400	VERY FINE	SOFT
Belt Length (mm)	533	533	533	533	533	533
Pc.x conf.	10	10	10	10	3	3
No.ord.	6.26280	6.26281	6.26282	6.26283	6.26298	6.26299



POLISHING PASTE, WHITE, BAR 250 G
6.23520
- For pre-polishing and polishing stainless steel



POLISHING PASTE, BROWN, BAR 250 G
6.23522
- For pre-polishing and polishing non-ferrous metals



POLISHING PASTE, BLUE, BAR 250 G
6.23524
- For high-gloss polishing of all metals



CORDLESS TABLE SAW

TS 36-18 LTX BL 254
613025850

18 V 18 V 36 V

BRUSHLESS
MACHINE ONLY



Maximum mobility thanks to the trolley function.

Integrated suction with cyclone technology for working with reduced dust development and without vacuum cleaner.

Powerful Metabo brushless motor for powerful sawing like with a mains-powered tool.

Max. support surface : 970 x 995 mm
Cutting height : 0 - 87 mm
Maximum cutting height 90/45°: 87 / 50 mm
No-load speed : 5000 rpm
Max. cutting speed : 66 m/s
Saw blade : 254 x 30 mm

STA 18 LTX 100
601002840

MACHINE ONLY



Cutting depth wood : 100 mm
Cutting depth NF metal : 25 mm
Cutting depth sheet steel : 10 mm

HO 18 LTX 20-82
602082890

MACHINE ONLY



Planing width : 82 mm
Adjustable planing depth: 0 - 2 mm
Maximum notch depth : 9 mm

CORDLESS VACUUM SET AS 18L PC
691060000

MACHINE ONLY



Air output max.: 2100 l/min
Vacuum: 120 hPa(mbar)
Container volume: 7.5 l

CORDLESS SABRE SAW
SSE 18 LTX Compact
602266840

MACHINE ONLY



Strokes in idle: 0 - 3100 rpm
Saw blade stroke: 13 mm
Quick retainer: Sabre and jigsaw blades


CORDLESS CIRCULAR SAW
KS 18 LTX 57
601857890

MACHINE ONLY




Maximum cutting depth at 90°: 57 mm
Saw blade Ø x bore: 165 x 20 mm
Guide Rail : FS 160

SABRE & JIGSAW SOLUTIONS

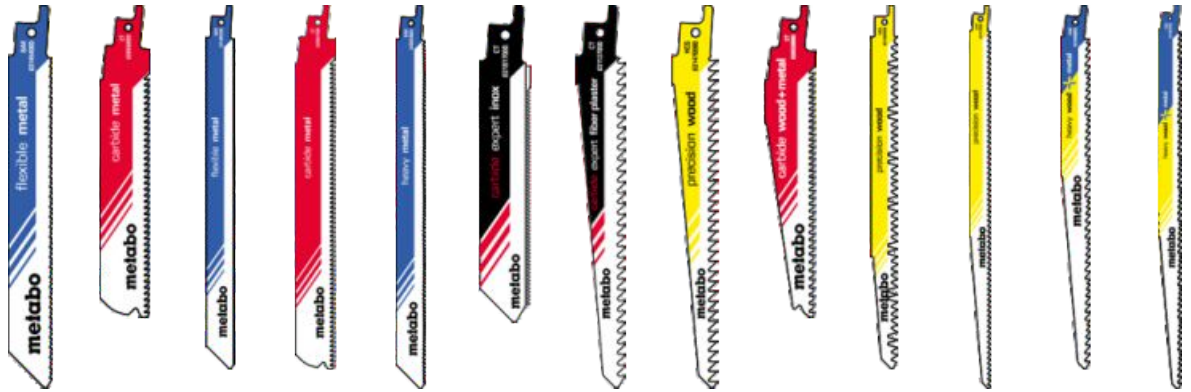

Step (mm)	1,4	3	1,4	3	1,8-2,6	1,4	4,3	4	3 - 4	5	4	3,2-5,1	3,2-5,1
Length. (mm)	150	150	225	225	300	115	150	150	150	240	300	225	300
Metal	[Blue bar]												
Wood							[Yellow bar]						
Pc. x conf.	2	1	2	1	5	2	1	2	1	2	2	5	5
No.ord.	6.31080	6.26556	6.31095	6.26557	6.28263	6.31817	6.31137	6.31120	6.26559	6.31139	6.31122	6.31986	6.31987

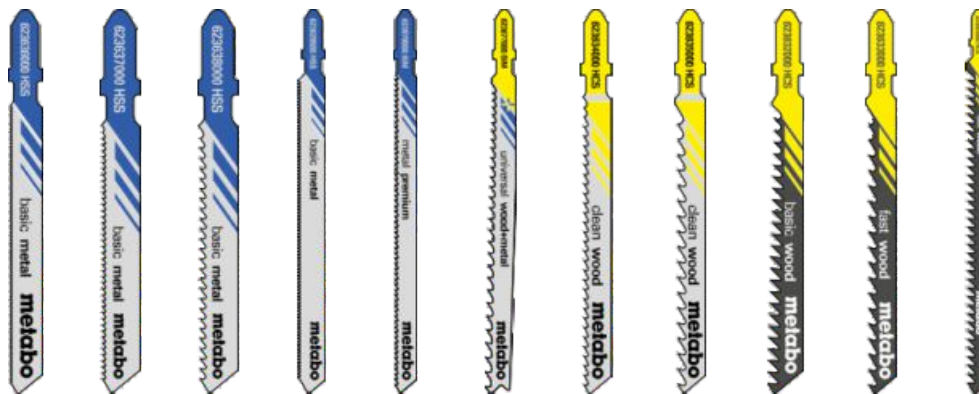

Step (mm)	0,7	1,2	2	1,2	1,8	2,4-5	2,5	4	3	4	4
Length (mm)	66	51	51	106	106	106	74	74	74	74	155
Metal	[Blue bar]										
Wood						[Yellow bar]	[Yellow bar]				
Pc. x conf.	5	5	5	5	5	5	5	5	5	5	5
No.ord.	6.23636	6.23637	6.23638	6.23629	6.23979	6.23677	6.23634	6.23635	6.23632	6.23633	6.23603

PROFESSIONAL SERIES CIRCULAR BLADES



PRECISION CUT WOOD PROFESSIONAL

	Ø 165	Ø 254
No.ord.	6.28290	6.28059
Perfectly suited for hard wood and plywood, untreated chipboards, coated or veneered, MDF, composite materials		

MULTI CUT - CLASSIC

	Ø 165	Ø 254
No.ord.	6.28661	6.28093
For high standards in cutting quality, e.g. for laminate, thin-walled plastic, aluminium, copper and brass materials		

metabo[®] PICK+MIX

1. Choose your desired combination
2. Only pay for what you need
3. Select your Battery Pack
4. Complete the set with perfect Accessories

ZA combo 4.0Ah

- ✓ 2 batteries 18 V / 4.0 Ah LiHD
- ✓ 1 ASC 55 charger
- ✓ Metaloc II



ZA combo 5.5Ah

- ✓ 2 batteries 18 V / 5.5 Ah LiHD
- ✓ 1 ASC 55 charger
- ✓ Metaloc II



ZA combo 8.0Ah

- ✓ 2 batteries 18 V / 8.0 Ah LiHD
- ✓ 1 ASC 55 charger
- ✓ Metaloc II



ZA combo 5.5Ah Duo

- ✓ 4 batteries 18 V / 5.5 Ah LiHD
- ✓ 1 ASC 145 charger Duo
- ✓ Metaloc II



87%
MORE
RUNTIME

67%
MORE
POWER

LiHD
TECHNOLOGY

DRILLING



Cordless Drill
BE 18 LTX - 6
600261890
4 Nm | 0-4000rpm



Cordless Tappers
GB 18 LTX BL QI
603828840
120Nm | 0-600/2050 rpm



Cordless Drill/Screwdriver
BS 18 LTX BL QI
602351890
120 Nm | 0-500/1850 rpm



Cordless Drill/Screwdriver
BS 18 LTX-3 BL QI
602355840
120 Nm | 0-500/3050/3800 rpm

SCREWDRIVING



NEW
Cordless Impact Wrench 1/4"
SSD 18 LTX 200 BL
602396840
200 Nm | 0-2900 rpm



Cordless Impact Wrench 1/2"
SSW 18 LTX 300 BL
602395890
300 Nm | 0-2650 rpm

SAWING



NEW
Cordless Sabre Saw
SSE 18 LTX Compact
602266840
0-3100 rpm



NEW
Cordless Sabre Saw
SSE 18 LTX BL
602267850
0-2700 rpm

CUTTING/GRINDING



NEW
Cordless Angle Grinder
CC 18 LTX BL
600349840
Ø 76 mm | 20000 rpm



NEW
Cordless Nibblers
NIV 13 LTX BL 1.6
601614840
Ø 5 mm | 660-2360 rpm

SPECIAL APPLICATIONS



NEW
Cordless Blind Rivet Gun
NP 18 LTX BL 5.0
619002840
2.4-5 mm | 10.000 N



NEW
Cordless Hot Air Guns
HG 18 LTX 500
610502850
300-500 C | 7/6 cfm

COMPLIMENTARY



Cordless Site Lights
BSA 14.4-18 LED
602111850
2600 lm



NEW
Cordless Heated Jacket
HJA 14.4 - 18
657028000
Six heating zones



ACCESSORIES



SDS-plus drill/ chisel set "SP", 17 pieces, in aluminum carry case (628414000)


Ø 5, 6, 8, 10 L=110 mm / Ø 6, 8, 10, 12 L=160 mm / Ø 8, 10 L=cc210mm / Ø 12, 14 L=260mm / Pointed Chisel L=140mm, L=250mm / Flat Chisel 20x140mm

Socket wrench set 1/2" impact-proof (628831000)

Consisting of 10 socket wrenches (10, 11, 12, 13, 15, 17, 19, 21, 22, 24 mm)



Metabo CIRCULAR SAW BLADES



Starter set Ø 76 mm (626879000)

Cutting disc, Grinding disc, Combinator, Diamond cutting disc

Universal professional



Tiler's set, 4 pieces (626419000)

Carbide segment saw blade 85 mm (tiles), Carbide triangular sanding pad 78 mm (tiles), Scraper rigid 52 mm HCS, Plunge saw blade 32 mm BIM (metal)



LPZ 4 Set (601585000) Air Tool Sets

Blow gun, PA spiral hose (4.9 m), EURO Plug-in nipple 1/4", Tyre inflation & pressure gauge, Paint spray gun, EURO Plug-in nipple 1/4"



Cordless Impact Drill Sb18 LT
602103840
60 Nm | 0-450/1600 rpm



Cordless Impact Drill SB 18 LTX BL Impulse
602382890
120 Nm | 0-500/1850 rpm



Cordless Impact Drill SB 18 LTX BL Impulse Quick
602353840
120 Nm | 0-500/1850 rpm



Cordless Impact Drill SB 18 LTX-3 BL Impulse Quick
602357890
120 Nm | 0-600/2050/3800 rpm



Cordless Impact Drill SB 18 LTX Impulse
602192840
110 Nm | 0-500/1700 rpm



Cordless Combination Hammer KHA 18 LTX BL 24 Quick
600211840
2.2 J | SDS-plus



Cordless Combination Hammer Quick Set ISA KHA 18 LTX BL 24
600211900
2.2 J | SDS-plus



Cordless Combination Hammer KHA 36-18 LTX 32
600796840
3.1J | SDS-plus



Cordless Impact Wrench 1/2" SSW 18 LTX 400 BL
602305890
400 Nm | 0-2150 rpm



Cordless Impact Wrench 1/2" SSW 18 LTX 600
502198890
600 Nm | 0-1500 rpm



Cordless Drywall Screwdrivers SE 18 LTX 4000
620048890
7 Nm | 0-4000 rpm



Cordless Drywall Screwdrivers SE 18 LTX 6000
620049890
5 Nm | 0-6000 rpm



Cordless Jigsaw STA 18 LTX 100
601002840
100 mm | 0-2800rpm



Cordless Jigsaw STAB 18 LTX 100 Quick
603828840
100 mm | 0-2800 rpm



Cordless Mitre Saw KGS 18 LTX 216
619001850
Ø 216 mm | 4200rpm



Cordless Circular Saw KS 18 LTX 57
603828840
57 mm | 0-4000 rpm



Cordless Metal Shears SCV 18 LTX BL 1.5
601615840
0-1350/4840 rpm



Cordless Angle Grinder W 18 LTX 125 Quick
602174840
Ø 125 mm | 8000 rpm



Cordless Angle Grinder WPB 18 LTX BL 125 Quick
613075840
Ø 125 mm | 9000 rpm



Cordless Angle Grinder WPB 36-18 LTX BL 230
613102840
Ø 230 mm | 6600 rpm



Cordless Calking Gun KPA 18 LTX 600
601207850
1-10 mm | 7259 N



Cordless Metal Cutting Circular Saw MKS 18 LTX 58
600771840
58 mm | 3600 rpm



Cordless Stirrer RW 18 LTX 120
601163850
0-750 rpm



Cordless Multi Tool MT 18 LTX
613021890
7000-18 000 rpm



Cordless Blower AG 18
602242850
74m/s



Cordless Vacuum Cleaner AS 18 LPC
602021850
7.5 l | 2100 l/min



Cordless Worksite Radio R 12-18 BT
600777850
Bluetooth Enabled



Cordless Compressor Power 160-5 18 LTX BL OF
601521850
8 Bar max



ANGLE GRINDERS 115MM

W 850-115
603607010



Rated input power: 850 W
Torque: 2 Nm

W 9-115
600354010



Rated input power: 900 W
Torque: 2.5 Nm

WP 11-115 QUICK
603621000

DEADMAN SWITCH



Rated input power: 1100 W
Torque: 3.2 Nm

WQ 1100-125 QUICK
610035010



Rated input power: 1100 W
Torque: 3.5 Nm

WP 13-125 QUICK
603629000

DEADMAN SWITCH



Rated input power: 1350 W
Torque: 3.4 Nm

WEP 17-125 QUICK
600547000

DEADMAN SWITCH



Rated input power: 1700 W
Torque: 3.7 Nm

ANGLE GRINDERS 125MM

ANGLE GRINDERS 150 - 180MM

WEPBA 17-150 QUICK
600552000

DEADMAN SWITCH



Rated input power: 1700 W
Torque: 4.3 Nm

W 24-180 MVT
606466000



Rated input power: 2400 W
Torque: 14 Nm

W 2200-230
606435010



Rated input power: 2200 W
Torque: 13.5 Nm

W 26-230 MVT
606474000



Rated input power: 2600 W
Torque: 18 Nm

WEPBA 26-230 MVT
606482000

DEADMAN SWITCH



Rated input power: 2600 W
Torque: 18 Nm

ANGLE GRINDERS 230MM

GRINDING & CUTTING WHEELS FOR GRINDERS



Novorapid INOX

NOVORAPID: POWERFUL ENTRY-LEVEL CLASS

∅ x thickness (mm)	115 x 1	125 x 1	180 x 1,5	230 x 1,9
No.ord.	6.16270	6.16271	6.16273	6.16274

GOOD CUTTING PERFORMANCE WITH GOOD TOOL LIFE.

Flexiarapid INOX

∅ x thickness (mm)	115 x 1	115 x 1,6	125 x 1	150 x 1,6	180 x 1,6	230 x 1,9
No.ord.	6.16186	6.16181	6.16187	6.16183	6.16184	6.16185

VERY HIGH CUTTING OUTPUT WITH GOOD TOOL LIFE BY USING SPECIAL CORUNDUMS



Flexiamant

UNIVERSAL DISC FOR ALL METAL PROCESSING

∅ x thickness (mm)	115 x 6	125 x 6	180 x 6	230 x 6
No.ord.	6.16726	6.16730	6.16560	6.16572

HIGH CUTTING OUTPUT WITH GOOD TOOL LIFE

CLEANING & POLISHING SOLUTIONS FOR STEEL



FLEXIAMANT Diameter x bore 115 x 22.23 mm

∅rit.	P 40	P 60	P 80	P 120
No.ord.	6.24241	6.24243	6.24244	6.24239

SUITABLE FOR ROUGH AND INTERMEDIATE GRINDING IN ALL FIELDS OF METALWORKING INCLUDING STAINLESS STEEL, STEEL, CAST IRON, AND SHEET STEEL



CUP BRUSH M 14

∅ Size (mm)	75 mm	80mm	100mm	100mm
Edge type.	Crimped	Knotted	Crimped	Knotted
No.ord.	6.23715	6.23710	6.16560	6.16572

FOR UNIVERSAL USE IN METAL PROCESSING, E.G. FOR CLEANING, DEBURRING, PURGING, REMOVING RUST, SMOOTHING WELDING SEAMS AND POINTS, STRIPPING SLAG, SCALES AND OLD PAINT

DIAMOND CUTTING DISC

Special short tooth segments for high cutting ability and clean cutting edges.



SP-U UNIVERSAL - Bore 22,23 mm

	∅ 115	∅ 125	∅ 150	∅ 180	∅ 230
No.ord.	6.24306	6.24307	6.24308	6.24309	6.24310

DIAMOND DRILL BITS FOR TILES (628317000)

M14 Thread for use on angle grinders

Developed for dry use, no separate cooling required

Set consisting of:

- 6 mm, 8 mm, 14 mm, 35 mm, 40 mm, 50 mm, 68 mm; 1 x Plusbox





BEVELLING TOOL



KFM 15-10 F
601752500

Rated input power :1500 W
Max. chamfer height at 45°:10mm



KFM 16-15 F
601753500

Rated input power:1600 W
Max. chamfer height at 45°:15mm

Convincing cost benefits

Beveling tool KFM 16-15 F

5x more edges processed in the same period of time

2,600 Watt angle grinders

Material: construction steel (S235JR) chamfer 15 mm x 45°

BURNISHING MACHINE SE 17-200 RT SET
602259500



Input power: 1700 W
No-load speed:800-3000 rpm
Spindle thread:M 14
Abrasive tool diameter:100-200 mm
Abrasive tool width:50 - 100 mm

ANGLE POLISHER PE 15-20 RT
615200000



For backing pad up to maximum:180 mm
Input power: 1500 W
No-load speed:300 - 1900 rpm

MAGNETIC CORE DRILL



MAG 32
600635500

Rated input power: 1000 W
Max. drill-Ø with core drill: 32 mm
Max. drill-Ø with spiral drill: 13 mm
Maximum drilling depth: 50 mm
Bit retainer: Weldon shaft 19 mm

MAG 50
600636500

Rated input power: 1200 W
Max. drill-Ø with core drill: 50 mm
Max. drill-Ø with spiral drill: 20 mm
Maximum drilling depth: 50 mm
Bit retainer: Weldon shaft 19 mm
Reversible (Tapping mode)



HSS CORE DRILL SET 6 PIECES
626624000

Core drill bits Ø 14/16/18/20/22/26 mm

Bevelling Accessories



	CARBIDE INDEXABLE INSERTS UNIVERSAL 10pcs	CARBIDE INDEXABLE INSERTS ALUMINIUM 10pcs	CARBIDE INDEXABLE INSERTS STAINLESS STEEL 10pcs
No.ord.	6.23564	6.23559	6.23565

MAGBASE ACCESSORIES



HSS CORE DRILLS, SHORT

Ø x Length (mm)	14x30	16x30	18x30	20x30	22x30	26x30
No.ord.	6.26502	6.26504	6.26506	6.26508	6.26510	6.26514

HSS CORE DRILLS, LONG

Ø x Length (mm)	14x55	16x55	18x55	20x55	22x55	26x55
No.ord.	6.26523	6.26525	6.26527	6.26529	6.26531	6.26535



MAG 32
CHUCK ADAPTER Weldon 19 mm
 (3/4" to 1/2" - 20 UNF)
 6.26611
GEARED CHUCK
 13 MM, 1/2"
 6.35302



MAG 50
MORSE TAPER MK 2 / B 16
 6.35115
FUTURO KEYLESS CHUCK
 13 MM, B 16
 6.36343



DIE GRINDER ACCESSORIES

GE 950 G PLUS	TENSIONING FRAME	FLEXIBLE SHAFT	
No.ord. 6.00618	No.ord. 6.28329	No.ord. 6.27608	
High torque and compact design thanks to robust planetary gear.	Sturdy hard rubber frame can be set up on a table or hung up	Suitable for speeds of 2,000 to 5,000 rpm	

ANGLE POLISHER ACCESSORIES

	HOOK AND LOOP BACKING PAD M 14	POLISHING SPONGE, COARSE	POLISHING SPONGE, FINE	LAMBSWOOL POLISHING DISC
Ø SIZE (mm)	Ø 147	Ø 160	Ø 160	Ø 150
No.ord.	6.23288	6.24915	6.24927	6.31217
	With hook and loop, for attaching polishing and sanding accessories	For polishing up weathered paintwork	For polishing paintwork	For dry polishing



WALL CHASER

MFE 40
604040500



Adjustable cutting depth: 10 - 40 mm
Cutting disc Ø 125 mm
Rated input power: 1900 W

MFE 40 - ACCESSORIES



DIA-CD3, 125X28.5X22.23MM, "PROFESSIONAL", "UP", UNIVERSAL (628299000)

Customized slots for individual lines of 30 mm (3 rows)



DIA-CD2, 125X18X22.23MM, "PROFESSIONAL", "UP", UNIVERSAL (628298000)

Customized slots for individual lines of 20 mm (2 rows)

SET

RSEV 19-125 RT

Cup wheel Ø: 125 mm

Torque: 5 Nm

No-load speed: 3800-8200 rpm

Rated input power: 1900 W

Spindle thread: M 14



ASR 35 L ACP

Air output max: 4380 l/min

Vacuum: 248 hPa (mbar)

Container volume: 35 l



RENOVATION MILLING MACHINE

RFEV 19-125 RT

603826710



Input power: 1900 W
Working width: 125 mm
Cutting depth: 0-6 mm
Torque: 16.8 Nm
No-load speed: 750-3100 rpm

LONG-NECK SANDER

LSV 5-225

600103000

Sanding disc diameter: 225 mm

No-load speed: 1000 - 1650 rpm

Rated input power: 500 W



ALL-PURPOSE VACUUM CLEANER

ASA 25 L PC

602014000

Air output max.: 3600 l/min

Vacuum: 210 hPa (mbar)

Container volume: 25 l



RENOVATION GRINDER & MILLING ACCESSORIES

	<p>DIAMOND CUP GRINDING WHEEL CONCRETE PROFESSIONAL</p>	<p>DIAMOND CUP GRINDING WHEEL ABRASIVE PROFESSIONAL</p>	<p>DIAMOND CUP WHEEL PCD PROFESSIONAL</p>	<p>DIAMOND CUP GRINDING WHEEL CONCRETE CLASSIC</p>
	<p>Ø SIZE (mm) Ø 125</p> <p>No.ord. 6.28205</p> <p>Particularly suited for grinding of thick concrete layers, levelling of concrete, preparation of concrete.</p>	<p>Ø 125</p> <p>6.28206</p> <p>Particularly suited for grinding of fresh concrete coatings, chalk and cement plaster, gypsum filler, levelling of fresh screed,</p>	<p>Ø 125</p> <p>6.28208</p> <p>Powerful specialized cup wheel. Ideally suited for spot grinding and removal of elastic protective coatings (on soft and hard surfaces), adhesives.</p>	<p>Ø 125</p> <p>6.28209</p> <p>For grinding of thick concrete layers, levelling of concrete, preparation of concrete, removal of sludge skins and formwork seams on concrete.</p>
	<p>CUTTING HEAD FLAT HEAD COMPLETE</p>	<p>MILLING STARS FLAT HEAD</p>		
	<p>Ø SIZE (mm) Ø 125</p> <p>No.ord. 6.28219</p> <p>For the removal of soft materials such as plaster, fresh ("green") concrete, foam backing and adhesive remains, soft PU coatings, paint coatings on plaster.</p>	<p>10 pcs</p> <p>6.28271</p> <p>For retrofitting the cutter head of the RFEV 19-125 RT.</p>		

LONG-NECK SANDER ACCESSORIES

<p>LSV 5-225 LONG-NECK SANDER SANDING SHEETS MULTI, LS</p>						
	Grit	P40	P60	P80	P100	P120
	Pc.X.conf.	25	25	25	25	25
	No.ord.	6.26649	6.26650	6.26651	6.26652	6.26653

VACUUM ACCESSORIES

<p>ASR 35 ACP SERIES</p>	<p>FILTER CASSETTES, POLYESTER, DUST CLASS M</p>	<p>PE DISPOSAL BAGS 35/50 L</p>	<p>FLEECE FILTER BAGS 25/35 L</p>	
No.ord.	6.31934	6.30325	6.30343	
Pc.X.conf.	1 SET	5 BAGS	5 BAGS	
	<p>ASA 25 PC SERIES</p>	<p>PLEATED FILTER FOR ASA DUST CLASS M</p>	<p>PE DISPOSAL BAGS 25/30 L</p>	<p>FLEECE FILTER BAGS 25/30 L</p>
	No.ord.	6.30299	6.30298	6.30296
	Pc.X.conf.	1 SET	5 BAGS	5 BAGS

IMPACT DRILLS



SBE 760
600841500

Rated input power: **760 W**
Maximum torque: **24 / 9 Nm**



SBE 780-2
600781500

Rated input power: **780 W**
Maximum torque: **32 / 13 Nm**



SBEV 1300-2
600785000

Rated input power: **1300 W**
Maximum torque: **44 / 16 Nm**

SDS-plus Rotary Hammers



KHE 2444
606154000

Rated input power: **800 W**
Max. Single blow energy: **2.3 J**
Drill-Ø concrete with
hammer drills: **24 mm**



KHE 2860 QUICK
600878500

Rated input power: **880 W**
Max. single blow energy: **3.2 J**
Drill-Ø concrete with
hammer drills: **28 mm**



UHEV 2860-2 QUICK
600713500

Rated input power: **1100 W**
Max. single blow energy: **3.4 J**
Drill-Ø concrete with
hammer drills: **28 mm**

The New SDS-Max Hammers

BRUSHLESS

**40 mm SDS-Max Demolition/
Chipping Hammer**

KHEV 5-40BL
600765500

Rated input power: **1150 W**
Max. Single blow energy: **8.7 J**



**52 mm SDS-Max Demolition/
Chipping Hammer**

KHEV 11-52BL
600767500

Rated input power: **1500 W**
Max. Single blow energy: **18.8 J**



SDS-Max Chipping Hammer

MHEV 5 BL
600769500

Rated input power: **1150 W**
Max. Single blow energy: **8.7 J**



SDS-Max Chipping Hammer

MHEV 11 BL
600770500

Rated input power: **1500 W**
Max. Single blow energy: **18.8 J**



AUTOCLEAN VACUUM



ASR 35 M ACP
M Class Auto Clean Vacuum
602058190



M class
suitable for wood
dust (eg: MDF)



ASR 35 H ACP
H Class Auto Clean Vacuum
602059190

H Class

(high risk) dust

includes dust

containing

carcinogenic

or pathogenic

particles such as

silica as well as

mould spores,

mineral fibres,

bitumen and artificial

mineral fibres such as

glass wool.



Extraction Systems



**Dust Extraction Adaptor
Dustless drilling 4 - 14 mm dia.**
Model: DDE14
630829000



**Dust Extraction Adaptor
Dustless drilling 72 mm dia.**
Model: DDE 72
631343000



**Dust extractor for drilling
and chiseling**
Model: ESA Max
623271000



SDS MAX »Pro 4«



Diameter	16	18	20	22	22	24	24	25	25	32	32	40
Total Length (mm)	540	540	540	340	540	340	540	340	540	540	940	740
Working Length (mm)	400	400	400	200	400	200	400	200	400	400	800	600
No.ord.	6.23318	6.23320	6.23310	6.23324	6.23325	6.23327	6.23328	6.23329	6.23330	6.233341	6.23342	6.23350

SDS Max Chisels



Type	POINTED	FLAT	GOUGE
Dimension (mm)	600mm	600x25	300x26
No.ord.	6.23358	6.23359	6.23357

DRILLS & CHISELS SDS -plus

»Pro 4 Premium« SDS-plus




Diameter	5	6	6	6	8	8	8	10	10	10	12	14	14
Total Length (mm)	165	115	165	215	165	215	265	165	215	265	260	210	310
Working Length (mm)	100	50	100	150	100	150	200	100	150	200	210	160	260
No.ord.	6.26201	6.26204	6.26205	6.26206	6.26216	6.26217	6.26218	6.26220	6.26221	6.26222	6.26227	6.26231	6.26232

SDS-plus Chisels



Type	POINTED	FLAT	TILE	GOUGE
Dimension (mm)	250mm	250X20	250X40	250X22
No.ord.	6.29178	6.29179	6.31456	6.31422

DRILL ACCESSORIES



HSS-G 19 PIECE DRILL BIT SET
 Ø 1-10 x 0,5 mm
 No.Ord. 6.27153

HSS-G 25 PIECE DRILL BIT SET
 Ø 1-13 x 0,5 mm
 No.Ord. 6.27154



Professional Series
HSS-CO 25 PIECE DRILL BIT SET
 Ø 1-13 x 0,5 mm
 No.Ord. 6.27122

	GEARED CHUCK 13 MM, 1/2"	GEARED CHUCK 16 MM, B 16	FUTURO PLUS KEYLESS CHUCK S2M 13 MM, 1/2"	FUTURO KEYLESS CHUCK 16 MM, B 18	ANGLE DRILLING AND SCREW-DRIVING ATTACHMENT
Clamping	1.5 - 13 mm	3 - 16 mm	1.5 - 13 mm	3 - 16 mm	1/2" - 20 UNF
Length Closed (mm)	74 mm	86 mm	72.4 mm	113 mm	43 mm Collar
Pc.x conf.	1	1	1	1	1
No.ord.	6.35302	6.35050	6.36620	6.36363	6.31078

RANDOM ORBITAL SANDER

SXE 150 - 5.0 BL NEW
615050000

Input power: **350 W**
Orbit diameter: **5.0 mm**
Diameter of backing pad: **150 mm**



BRUSHLESS

NEW **SXE 150-2.5 BL**
615025000

Input power: **350 W**
Orbit diameter: **2.5 mm**
Diameter of backing pad: **150 mm**

ORBITAL SANDER

FSR 200 Intec
600066500



Input power: **200 W**
Base plate: **114 x 102 mm**
Orbit diameter: **1.4 mm**

RANDOM ORBITAL SANDER

SXE 3150
600444000



Input power: **310 W**
Orbit diameter **3 mm**
Diameter of backing pad **150 mm**

RANDOM ORBITAL SANDER

SXE 450 TurboTec
600129000



Input power: **350 W**
Orbit diameter **2.8 mm**
Diameter of backing pad **150 mm**

PLANER

HO 26-82

602682000

NEW



Input power: **620 W**
Planing width: **82mm**
Adjustable planing depth: **0-2.6 mm**

JIGSAW
STEB 65 QUICK
601030000



Input power: **450 W**
Cutting depth wood: **65 mm**
Strokes in idle: **600 - 3000 rpm**

JIGSAW
STEB 140 PLUS
601404500



Input power: **750W**
Cutting depth wood: **140mm**
Strokes in idle: **1000-3100 rpm**

MULTI TOOL
MT 400 QUICK
601406500



Rated input power **400 W**
Orbital frequency with no load:
11000 - 18500 rpm

SABRE SAW
SSEP 1400 MVT
606178500



Rated input power **1400 W**
Strokes in idle **0 - 2800 rpm**

CIRCULAR SAW
KS 55 FS SET
691064000



Guide Rail : **FS 160**
Rated input power: **1200 W**
Maximum cutting depth at **90°: 55 mm**
Maximum cutting depth at **45°: 39 mm**



SXE 150 BL - WOOD + METAL, "MULTI-HOLE" SANDING SHEETS 150 MM

Grit	P80	P100	P120	P180	P240	P320	P400
Pc.X.conf.	50	50	50	50	50	50	50
No.ord.	6.26678	6.26677	6.26678	6.26679	6.26680	6.26681	6.26682



HO 26-82 Accessories REVERSIBLE CARBIDE PLANER BLADES



Pc.X.conf.	1 SET(2 BLADES)	5 SET(10 BLADES)
No.ord.	6.30282	6.30272

Suitable for HO 18 LTX 20-82 / HO 26-82 / HO 0882

FURTHER WOOD WORKING SOLUTIONS



BIT BOX "SP", 71 PIECES

No.Ord.6.26704

L = 25 mm (60 pcs):

- PH 1 x 3, PH 2 x 6, PH 3 x 3;
- PZ 1 x 3, PZ 2 x 6, PZ 3 x 3;
- SL 4 x 3, SL 6 x 3;
- H 4 x 3, H 5 x 3, H 6 x 3;
- T 10 x 3, T 15 x 3, T 20 x 3, T 25 x 3,
- T 27 x 3, T 30 x 3, T 40 x 3

L = 75 mm (9 pcs):

- 1x PH 1, PH 2, PH 3;
- PZ 1, PZ 2; SL 4, SL 6;
- T 20, T 25
- 1 x magnetic bit holder;
- 1 x magnetic quick-change bit holder



BIT BOX "SP", 32 PIECES

6.26700

L = 25 mm(30 pcs.)

- PH 1 x 1, PH 2 x 2, PH 3 x 1;
- PZ 1 x 1, PZ 2 x 2, PZ 3 x 1;
- SL 3, SL 4, SL 5, SL 6
- H 3, H 4, H 5, H 6; T 10, T 15,
- T 20, T 25, T 27, T 30, T 40
- T 10, T 15, T 20, T 25, T 27,
- T 30, T 40

- 1x adapter,
- 1x magnetic quick-change bit holder 65 mm



BIT BOX AND RATCHET SET "SP" 26 PIECES

No.Ord. 6.26701

L = 25 mm (18 pcs):

- 1x PH 1, PH 2, PH 3;
- PZ 1, PZ 2, PZ 3;
- H 3, H 4, H 5, H 6;
- T 10, T 15, T 20, T 25, T 30;
- SL 4, SL 5.5, SL 6.5

Socket wrench (6 pcs):

- 1x 1/4", 6 mm, 7 mm, 8 mm,
- 10 mm, 13 mm
- 1 x extension,
- 1 x ratchet



BIT BOX "SP", 15 PIECES

6.26703

L = 25 mm (14 pcs):

- 1 x PH 1, PH 2;
- PZ 1, PZ 2;
- SL 4, SL 6;
- H 3, H 4, H 5;
- T 10, T 15, T 20,
- T 25, T 30

- 1 x magnetic bit holder



GUIDE RAIL
FS 160



CONNECTOR
FSV



MITRE FENCE
FSW



QUICK TENSIONING
CLAMP
FSSZ



FS GUIDE RAIL SYSTEM

	For straight and secure guidance	For the tool-free connection of two guide rails for particularly long cuts	Angle adjustable from -60° to +60°	Solid hold even in case of vibrations
No.ord.	6.29011	6.29022	6.29026	6.29021

KGS 216 M SET



Rated input power: **1500 W**
 Maximum cutting width 90°/45°: **305/205 mm**
 Maximum cutting depth at 90°/45°: **65/36mm**
 Accessories : **KSU 251**

KGSV 72 Xact
 612216000
 Compound mitre

Rated input power: **1800 W**
 Maximum cutting width 90°/45°: **305 / 215 mm**
 Maximum cutting depth at 90°/45°: **72 / 42**



KGS 315 Plus
 0103150000
 Compound mitre



Rated input power : **2200 W**
 Maximum cutting width 90°/45°: **320/223 mm**
 Maximum cutting depth at 90°/45°: **120/76 mm**

BENCH THICKNESSER

DH 330
 0200033000



Rated input power: **1800 W**
 Chip removal bench thicknesser: **0-3mm**

CHIP & DUST EXTRACTION UNIT

SPA 1200
 601205000

Rated input power: **0.55 kW**
 Maximum vacuum: **1600 Pa**
 Hose connection Ø: **100 mm**
 Chip bag capacity: **65 l**

Compatibility:

- KGS 315 PLUS
- KGS 254 I
- BAS 261 Precision WNB
- BAS 318 Precision WNB
- DH 330
- HC 260 C



PLANER THICKNESSER

HC 260 C - 2.2 WNB
 0114026000



Rated input power: **2200 W**
 Chip removal, planing: **0-3 mm**
 Chip removal bench thicknesser: **0-3 mm**

BAND SAW

BAS 318 PRECISION WNB
 619009000

Rated input power: **900 W**
 Cutting height: **170 mm**
 Passage width: **307 mm**

BAS 261 PRECISION WNB
 619008000

Rated input power: **400 W**
 Cutting height: **103 mm**
 Passage width: **245 mm**



PROFESSIONAL SERIES MITRE BLADES



PRECISION CUT WOOD CLASSIC

MULTI CUT PROFESSIONAL

	Ø 216	Ø 315	Ø 216	Ø 315
No.ord.	6.28060	6.28225	6.28083	6.28226

Perfectly suited for hard wood and plywood, untreated chipboards, coated or veneered, MDF, composite materials

Perfect cutting results, also for cross-cuts in solid wood, coarse, coated or veneered chipboards, MDF

BENCH THICKNESSER/PLANER THICKNESSERS ACCESSORIES



	HSS PLANER BLADES DH 330	HSS PLANER BLADES DH 330/316	DISPOSABLE REVERSIBLE BLADES	PLANER BLADE AND RETAINING STRIP CONVERSION SET	HSS PLANER BLADES HC 260 C/M/K
No.ord.	0911062119	0911063549	0911030713	0911030845	0911030721
Pc.x conf.	2	2	2	1 SET	2

CHIP AND DUST EXTRACTION ACCESSORIES



	CHIP COLLECTION BAGS SPA 1200 (10PCS)	AUTOMATIC SWITCH-ON DEVICE ALV	UNIVERSAL ADAPTER	FILTER CARTRIDGE SPA 1200
No.ord.	0913017617	0913014626	0913031288	0920016529
	613 x 1180 mm, 120 µ , transparent	Automatic power on/off of the chip and dust extraction unit after the wood processing machine has been switched on or off	As a coupling for transition ring or extraction nozzle DH 330	Certified for extracting hazardous dust particles of dust class M

BAND SAW ACCESSORIES



	CIRCLE CUTTING ATTACHMENT BAS 261 / 318	BAS 318 BLADE	BAS 261 BLADE
No.ord.	6.31327	0909029279	0909057183
Pc.X.conf.	1	1 X 2240 X 15 X 0.5 A2	1 X 1712 X 12 X 0.36 A6

CAS

Cordless Alliance System

The cordless alliance system (CAS) makes you independent from the wall socket. Profit from problem-free compatibility for machines, battery packs and chargers of different manufacturers. This permits a number of professional applications also with cordless tools from standard to special tasks.

100% compatibility for over 160 machines in the 18V class



metabo

ROTHENBERGER

Collomix

STEINEL

PREBENA

mafell

EISENBLÄTTER

EIBENSTOCK
Elektrowerkzeuge

ROKAMAT

part of starmix
haaga

Pressfit

starmix

fischer

BIRCHMEIER

edding

JÖST

Cembre



METABO POWER TOOLS
165 Vanderbijl Street
Meadowdale, Germiston
Johannesburg, South Africa
www.metabo.com/za/en



metabo®

PROFESSIONAL POWER TOOL SOLUTIONS